

CallFinder® CDMA

Cellular Gateway




The CallFinder® CDMA cellular gateway enables small to medium sized businesses to take advantage of lower cost wireless networks to provide a substantial savings in their overall telephone bill. It connects to a PBX trunk line, PBX extension line, or a single PSTN line and routes incoming and outgoing calls through a CDMA wireless network. Equipped with both FXS and FXO interfaces, the gateway offers a wide range of potential applications. When connected to a PBX or Key Telephone System, it converts an expensive PSTN-to-CDMA call into a direct mobile-to-mobile call. When connected to an analog telephone, it can serve as the primary voice network for small remote offices or other locations that don't have a fixed line infrastructure. In addition, it can be used for temporary telephone line needs in emergency situations.

Features

- Connects to PBX, Key Telephone System, analog phones or analog phone lines
- Dual-band GSM 800/900 MHz CDMA
- Qualcomm® MSM6050 chipset
- FXS and FXO interfaces
- U.S. Caller ID reporting
- Line reversal features for disconnect and billing
- Voice features include EVRC, 13kQCELP and AMPS voice
- SMA antenna connector
- Desktop or panel mounting
- Numerous LEDs provide operational status
- AT command compatible
- Small footprint
- Carrier approved
- CDG 1 and 2 network certified
- Two-year warranty

Benefits

- Toll bypass / toll reduction over wireless network
- Primary voice network or PSTN service backup
- Temporary emergency telephone line

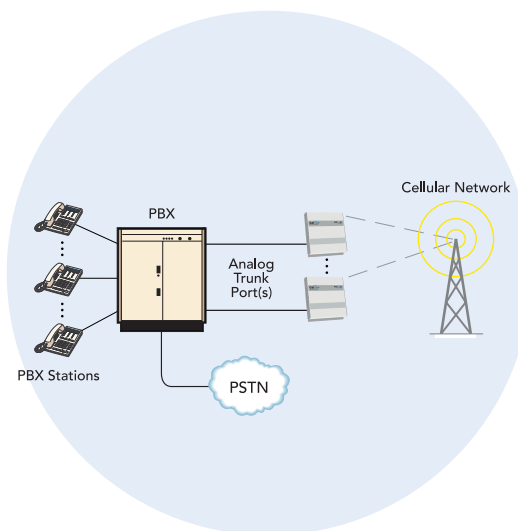

Highlights

Gateway Between CDMA and Landlines. The CallFinder CDMA cellular gateway connects to a PBX, KTS or analog phone to route incoming and outgoing calls over a CDMA network. The gateway can be connected to an analog CO port (POTS line) or analog station port (extension line) on the PBX or KTS. When connected to the CO port, the user simply dials a prefix pre-programmed for connecting to the CDMA network and then dials the number desired. When connected to a station port, the line to the CDMA network is activated by dialing the extension number, and then the number. When directly connected to an analog phone, the user simply dials the number.

Toll Bypass / Toll Reduction. The CallFinder CDMA cellular gateway is an effective solution for any company looking to reduce telephone call costs. Since most cellular rate plans are fairly inexpensive, and cellular-to-cellular calls are often free, a company can immediately realize substantial savings in fixed line-to-mobile long distance calling. In addition, calls over a cellular network to any destination are often free on nights and weekends.

Primary Voice Network for Remote Locations. The CallFinder CDMA cellular gateway provides a fast, easy fixed line alternative for small offices, SOHO environments or other remote locations. Simply connect an analog phone to the gateway, and the user can make affordable cellular calls over the CDMA network. There is no need for fixed wiring, making it an ideal solution to any environment where a fixed line is not readily available such as mobile centers, or retail kiosks.

Temporary Telephone Line Needs. The CallFinder CDMA cellular gateway provides an easy, quick solution in emergency situations. If PSTN service were to go down, a CDMA gateway attached to the phone system would allow users to make and receive calls over the CDMA network. This solution provides affordable "peace of mind" and helps ensure critical communication in disaster situations.

Comprehensive Service and Support. The Multi-Tech commitment to service means we provide a two-year product warranty and service that includes free telephone technical support, 24-hour web site and ftp support.

Specifications

Voice Features

EVRC, 13kQCELP, & AMPS voice

Antenna Connector

50 ohm SMA (Female connector)

Interface Connector

(1) RS-232 DB-9

Voice Connectors

(2) RJ-11 (1 - FXS, 1 - FXO)

FXS Interface: Analog phone or PBX/KTS CO port; loop start

FXO Interface: PBX/KTS station port or CO line; loop start

Power Connector

2.5mm miniature screw

Power Requirements

5V to 32VDC

Physical Description

6" L x 6.4" W x 1.2" H; 1.35 lbs.

(15.2 cm x 16.3 cm x 3.0 cm: 612g)

Operating Environment

0° to +50° C

Certifications

EMC: FCC Part 2, 15 Class A, 22, 24; EN 55022; EN 55024

Safety: cUL, UL 60950; EN 60950

Network: CDG 1 & 2

Ordering Information

Product	Description	Region
CF100FX2-C	1-Port CDMA Gateway (FXS/FXO)	Regional

Go to www.multitech.com for detailed product model numbers.

Made in Mounds View, MN, U.S.A.

Features and specifications are subject to change without notice.

Trademarks / Registered Trademarks: CallFinder, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / All other products and technologies are the trademarks or registered trademarks of their respective holders.

World Headquarters

Tel: (763) 785-3500
(800) 328-9717

www.multitech.com

EMEA Headquarters

Multi-Tech Systems (EMEA)
United Kingdom

Tel: +(44) 118-959 7774

Multi-Tech Systems (EMEA)
France

Tel: +(33) 1 64 61 09 81